

POLYAMID SMALL HEATERS


P/N: DXU-2827-S0XX



SPECIFICATION

Material:

1. Substrate and coverlet: UL approved Polyimide film 0.025mm thick
2. Adhesive: High-temp double sided 3M VHB PSA
3. Wire: UL 1332 Teflon insulated 26AWG length 300mm
4. Heater thickness: 0.2mm, 2.5mm max in wire tab area
5. Environment: $T < 150 \text{ deg C}$

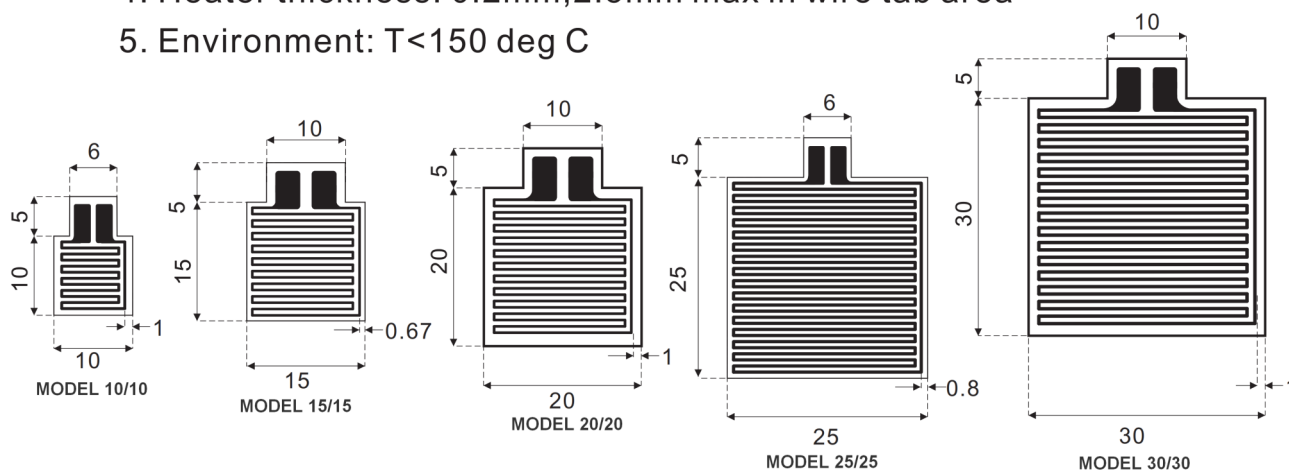

DIMENSIONS

Model No.	Size X	Size Y	Resistance
0614	14	06	15.0 ohm±5%
1010	10	10	5.0 ohm±5%
			10.0 ohm±5%
			15.0 ohm±5%
			20.6 ohm±5%
1515	15	15	15.0 ohm±5%
			20.0 ohm±5%
			50.0 ohm±5%
			55.0 ohm±5%
			60.0 ohm±5%
			90.0 ohm±5%
2020	20	20	4.3 ohm±5%
			5.2 ohm±5%
			5.7 ohm±5%
			7.2 ohm±5%
			16.0 ohm±5%
			20.0 ohm±5%
			50.0 ohm±5%
			97.0 ohm±5%
			153.6 ohm±5%
			12.0 ohm±5%
2525	25	25	14.0 ohm±5%
			18.0 ohm±5%
			20.0 ohm±5%
			25.0 ohm±5%
			50.0 ohm±5%
			10.0 ohm±5%
			12.0 ohm±5%
			15.0 ohm±5%
3030	30	30	20.0 ohm±5%
			25.0 ohm±5%
			30.0 ohm±5%
			1.2 ohm±5%
			5.5 ohm±5%
			35.0 ohm±5%
			327.7 ohm±5%
			7.2 ohm±5%
3535	35	35	8.6 ohm±5%
			9.6 ohm±5%
			12.0 ohm±5%
			22.5 ohm±5%
4040	40	40	

