
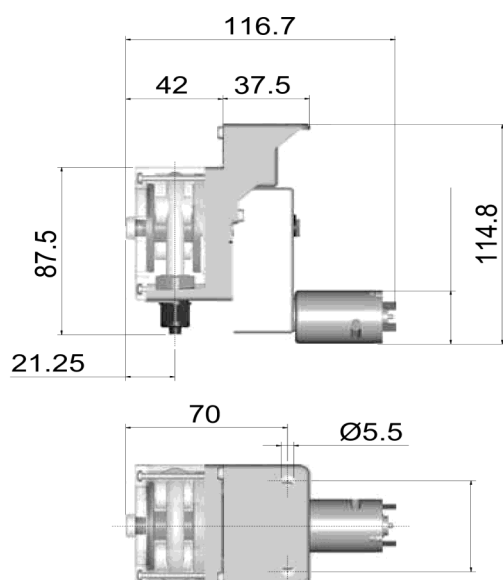



PERISTALTIC PUMP
64mm
P/N: MPO-4660-S000

DIMENSIONS:


PUSH-ON HOSEBARB	A
ID. 4,8	Ø 6,7
ID. 6,4	Ø 8,7
ID. 8	Ø 10,1

SCREW-FIT HOSEBARB
HOSE MIN Ø 3.2
HOSE MAX Ø 6.4


CHARACTERISTICS

- Power supply DC 12/24 Volt.
- Hosing available in silicone or Santoprene (food applications)
- Adjustable speed or dosing time via trimmer setting

SETTING HOSE
Ø 4,8 X 8
Ø 6,4 X 9,6
Ø 7,5 X 10,7

TECHNICAL DATA

- The RPMs are for reference only, using water.
- Pump injection in-line pressure: approximately 1 bar

24V DC (ml/min)

Ø HOSE	10RPM	25RPM	48RPM
4,8 X 8,0	32	59	125
6,4 X 9,6	44	84	168

- Variable output flow-range from 10 ml/min to 585 ml/min
- Hoses and barbs are produced in materials suitable to the contact with foods.
- Compliant with RoHS directive 2011/65/EU