


IP67 PANEL-MOUNT PUSHBUTTON

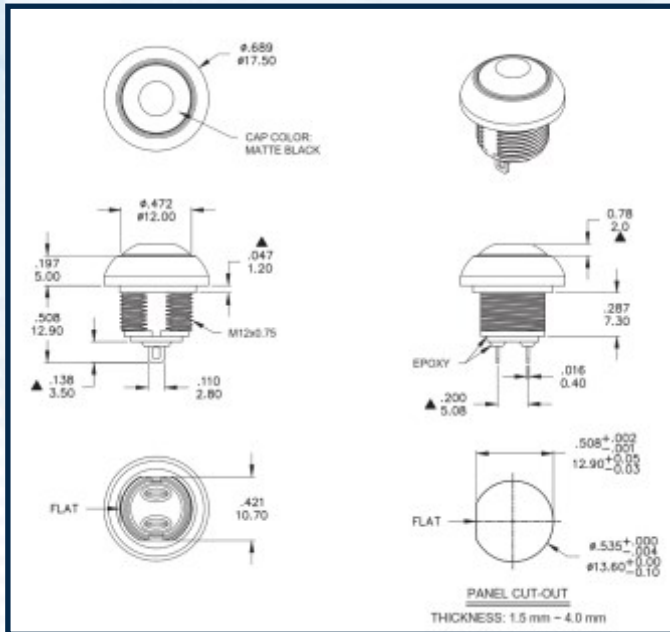

P/N: SFA-2323-S000

MECHANICAL SPECIFICATIONS:

Actuation force: 2N~5N.

Travel: 1.5 mm.

Operating cycles: 500,000 cycles min.

Torque: 0.5Nm max.

ENVIRONMENTAL SPECIFICATIONS:

Temperature range: -30/+85 °C.

Water & Dust protection: IP-67.

ELECTRICAL SPECIFICATIONS:

Contact form: N.O

Maximum rating: 200 mA 50VDC.

Contact resistance: 50m Ohm.

Dielectric strength: 1,500 VAC rms.

MATERIALS:

Housing: DAP UL94V-0.

Cap: PA 6/6.

Terminals & Contacts: Gold over silver plated.

Options & information:

Cap colors: Black, Green, Red, Yellow, White, Orange, Blue.

Metal housing is available.

N.C Contact form is available.

Different cap styles.