

ENABLE SWITCH: 3 POSITIONS-MEDIUM

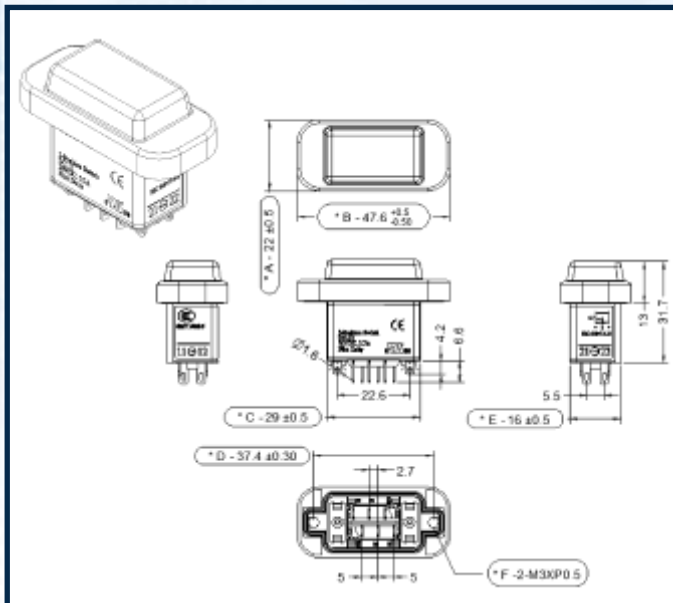


Image for illustration only

P/N: SBD-2256-S000

MECHANICAL SPECIFICATIONS:

Function: 2 position.

Number of poles: 2

Life cycles: 1,000,000

Operator strength: 250N Min.

ELECTRICAL SPECIFICATIONS:

Resistive rating: 1A/30VDC.

Insulation resistance: 100 MΩ minimum (500V DC megger).

Short circuit current: 50A (250VAC).

Life cycles at full load: 100,000.


Contact resistance: 50 mΩ maximum.

ENVIRONMENTAL SPECIFICATIONS:

Temperature range: -25/+60 °C.

Shock resistance: 1 50 m/s²

Water & Dust protection: IP-65.

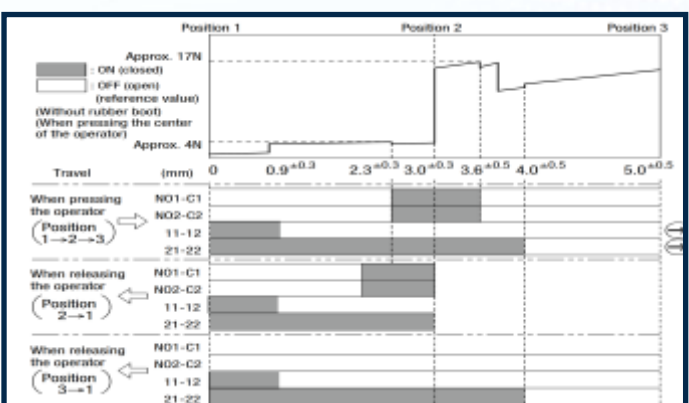

Options & information:

Rubber Boot Material: Silicon Rubber Color: B: black Y: yellow . NBR/PVC Polyblend Color: gray.

