


250A/750VDC SPRING CONTACT

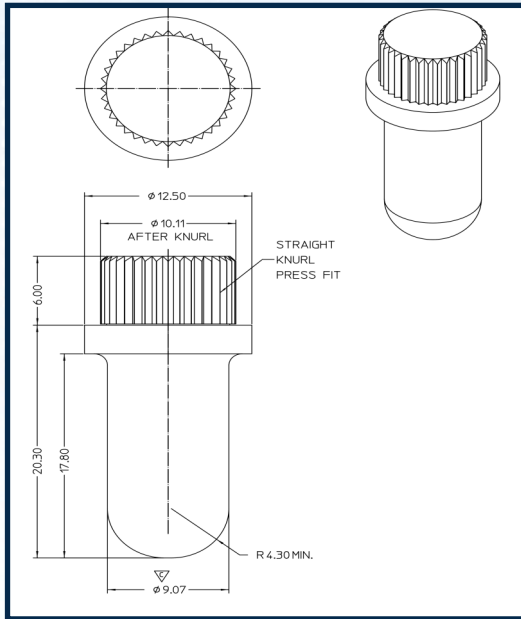

P/N: TNI-9775-S000

MECHANICAL SPECIFICATIONS:

Mate force: 18N Max 5N Min

Operation cycles: 10,000 cycles min.

Package: Tape & Reel.

ENVIRONMENTAL SPECIFICATIONS:

Operating temperature range: -40/+130 °C

ELECTRICAL SPECIFICATIONS:

Contact resistance: 0.25m Ohm.

MATERIALS:

Terminal: cooper Alloy.

Plating: silver 100 μ .

Options & information:

Mating side P/N: CNI-9770-S000