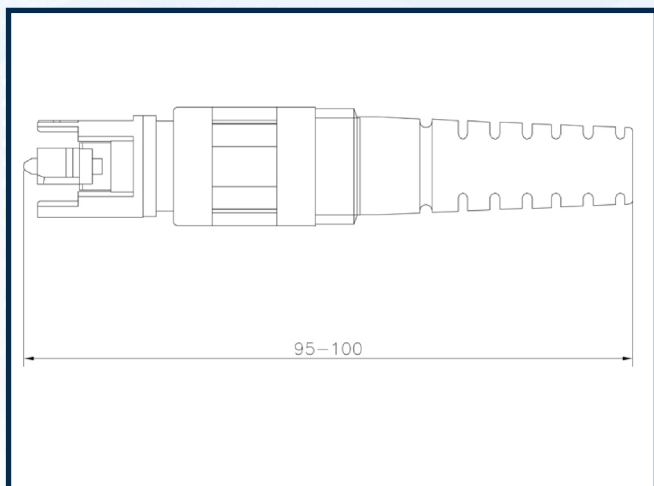


IP 68 FIBER CONNECTOR**P/N: CHP-2282-S000****MECHANICAL SPECIFICATIONS:**

Mating cycles: 500 Min.

ENVIRONMENTAL SPECIFICATIONS:

Operating temperature range: -24/+75 °C

Water & dust protection: IP-68

OPTICAL SPECIFICATIONS:

SC, LC DUPLEX:

Insertion loss: $\leq 0.30\text{dB}$

Return loss: $\geq 50\text{dB}$ (PC), 55dB (UPC), 60dB (APC)

OPTICAL SPECIFICATIONS:

MT:

Insertion loss: $\leq 0.75\text{dB}$

Return loss: $\geq 50\text{dB}$ (APC)

Options & information:

Mating side.

Meets Telcordia GR-3120 -Core Requirements.