


16mm IP67 METAL PUSHBUTTON

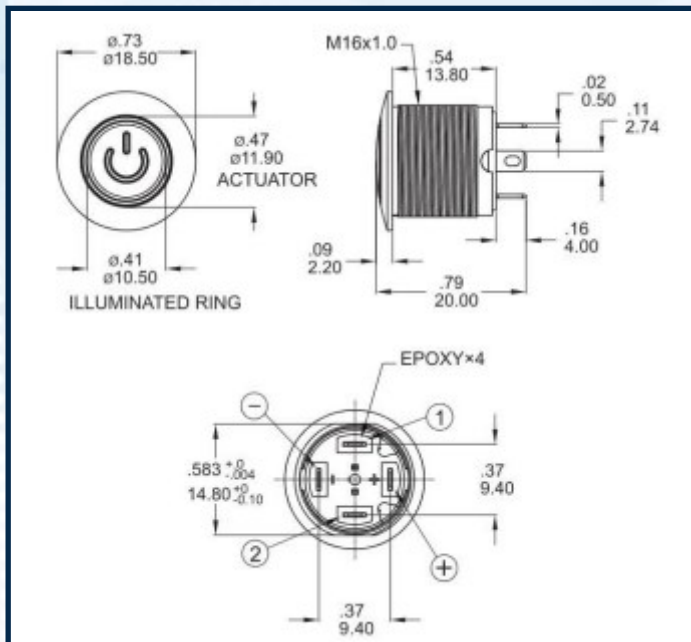

P/N: SFA-2390-S000

MECHANICAL SPECIFICATIONS:

Actuator travel: 2.0 $\pm$ 0.20mm.
 Operating cycles: 200,000 cycles Min.
 Panel cut-out: 16mm +0.2/-0.0 ("D-Shape" is Optional).
 Panel thickness: 8.00mm Max.

ENVIRONMENTAL SPECIFICATIONS:

Temperature range: -20/+70 °C.
 Water & dust protection: IP67.

ELECTRICAL SPECIFICATIONS:

Rating: 2A/36VDC.
 Function: 1xN.O Momentary.
 Illumination: Power-Symbol, Green, 12V.
 Contact resistance: 50m Ohm.
 Dielectric strength: 2,000V RMS.

MATERIALS:

Bushing: Aluminum, Black plate.
 Cap: Aluminum.
 O-Ring : Silicon
 Contacts: Silver alloy

Options & information:

Housing & cup colors: Silver or Black.
 Illumination type: Ring or Power-symbol.
 Illumination colors: RGB, Red/Green, Blue, White, Green, Red, Yellow.
 Illumination voltage. 3, 6, 12, 24, Without.
 flying leads—Optional.