


POLARITY CHANGE MPO





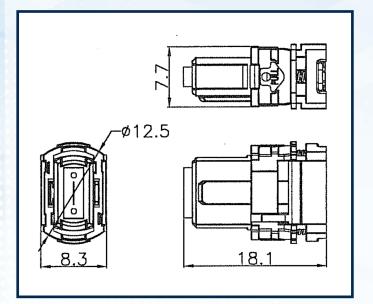

P/N: CHP-2338-S000

MECHANICAL SPECIFICATIONS:

Push-pull Key housing enable reverse key position.

Life cycles: 500 matings.

ENVIRONMENTAL SPECIFICATIONS:

Operating temperature range: -20/+75 $^{\circ}$ C

EOPTICAL SPECIFICATIONS:

Insertion loss:

Single mode: 0.35 or 0.7bd

Multi mode: 0.35 or 0.50db

Options & information: