



DPST MINIATURE ROCKER

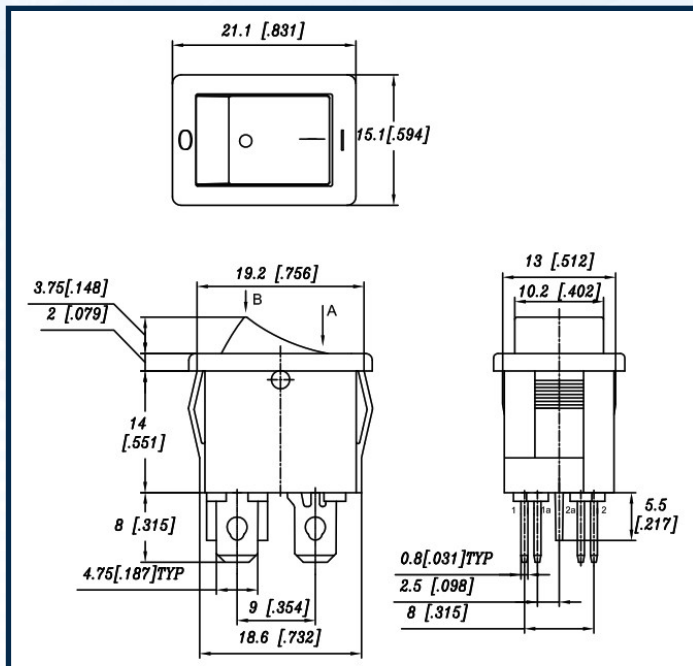

P/N: SHI-8770-S000

MECHANICAL SPECIFICATIONS:

Panel cut-out: 12.90~13.10 X 19.3~19.6.

Panel thickness: 1.25-3.00mm

Operation cycles: 10,000 cycles min.

ENVIRONMENTAL SPECIFICATIONS:

Temperature range: -25/+85 °C.

Ambient humidity: Max. 85%.

Water & Dust protection: IP-20.

ELECTRICAL SPECIFICATIONS:

Maximum rating: 6A/24VDC.

Contact resistance: 20m Ohm.

Dielectric strength: 1500V for 1 minute.

Inrush current: 80A.

MATERIALS:

Housing: PA 66.

Rocker: Rocker: PC & PA66.

Contacts: Brass Silver plated.

Movable arm: Beryllium copper.

Options & information:

AC rating: 6A/250, 9A/125.

Housing colors: Black, Gray, White.

Actuator colors: Black, Gray, White, Red, Blue, Green, Orange.

Lighted versions: 6,12,24,125,250 volt. LED/LAMP & resistor are assembled between terminals 1 to terminal 2.