





POWER ENTRY MODULES




1. PHYSICAL DIMENSIONS:(mm)

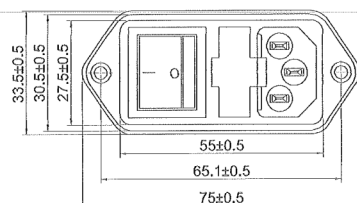

SUGGESTED CUTOUT MOUNTING DIMENSIONS OF SOCKET



2.SCHEMATIC:

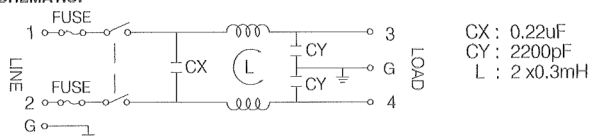

P/N: CKB-1330-S000

ELECTRICAL SPECIFICATIONS:

Current rating: 10A.

Dual-fuse holder and a 2-pole rocker switch.

Leakage current: Each line to ground: 0.6mA Max.

Hipot rating (For 1 minute): L-to-L 1450VDC, L-to-G 2250VDC

Insulation resistance: 250VDC/100m OHM

Direct current resistance: 0.1 Ohm Max.

ENVIRONMENTAL SPECIFICATIONS:

Operating temperature range: -25/+85 °C

Options & information:

Fast-On terminals.

Rated Currents 1,2,4 & 6 are available.

Illuminated or non-illuminated rocker switch available.